TECLOCK®

SmartTester®

世界初

Bluetooth内蔵ハンディタイプデュロメータ JIS / ISO準拠

GSB Series 新発売

待望のBluetooth内蔵 デュロメータ（ゴム硬度計）

デュロメータシェアNo.1テクロックより登場

Bluetoothでデータをワンプッシュ送信

BluetoothでPC・スマホ・タブレットにダイレクト接続、ワンプッシュでデータ送信。ハンディタイプで測定時に手を放さずに片手で測定可能。

無料アプリとの連携で多機能化も実現

SmartMeasure® Liteと連携することで、硬度のピーク値や経時変化をリアルタイムモニタリング。より高度な測定とデータ管理をサポート。

JIS K 6253 / ISO 48 / ASTM D 2240に準拠

TypeA、TypeDをラインナップ。今後さらにラインナップ拡充予定。

■ 仕 様

	TypeA	TypeD
最少表示量	硬さ0.1	
許容差	硬さ±0.5	
準拠規格	JIS K 6253／ISO 48／ASTM D 2240	
本体色	シャンパンゴールド／シャンパンブルー	
スプリング荷重値	550-8050mN（56.1-821.1gf）	0-44450mN（0-4533gf）
加圧面	角ベース：W39×D16／丸ベース：Φ18	
押針高さ	2.50mm	
Bluetooth送信	内蔵（標準搭載）	
質量	約320g	



TECLOCK提供 無料アプリ

SmartMeasure® Lite を連携


ストップウォッチなどの秒数カウントが不要に

ゴム硬さ測定で重要な
ピーク値、経過時間による測定値に対応

TimerA,B の秒数は任意設定可能！

例えば ●TimerA：3秒 ●TimerB：15秒

選べる加圧面とカラー

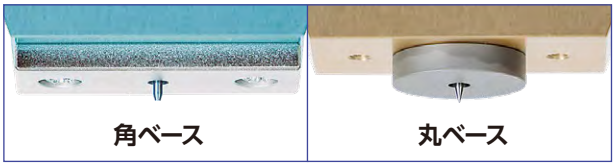





■ Lineup

シャンパンゴールド

※画像はTypeD、丸ベース

TypeA

角ベース GSB-719N-CG
丸ベース GSB-719R-CG
標準価格 ￥198,000

TypeD

角ベース GSB-720N-CG
丸ベース GSB-720R-CG
標準価格 ￥198,000

シャンパンブルー

※画像はTypeA、角ベース

TypeA

角ベース GSB-719N-CB
丸ベース GSB-719R-CB
標準価格 ￥198,000

TypeD

角ベース GSB-720N-CB
丸ベース GSB-720R-CB
標準価格 ￥198,000

記載内容は断り無く変更となる可能性があります

SmartTester®

GSB Seriesに関するご質問・お問い合わせはこちらから

株式会社 テクロック
株式会社 テクロック・スマートソリューションズ

https://teclock.co.jp テクロックサイト
teclock@teclock.co.jp
テクロック

本社・中部営業所 〒394-0042 長野県岡谷市成田町2-10-3 TEL.(0266)22-4911（代表） FAX.(0266)22-4914
東京支社・東部営業所 〒105-0014 東京都港区芝2-10-1 芝ブライトビル3階 TEL.(03)5765-5333/5334 FAX.(03)5765-5335
大阪支社・西部営業所 〒577-0012 大阪府東大阪市長田東2-1-31-305 TEL.(06)6743-0555 FAX.(06)6743-0558

TECLOCK®

SmartTester™

WORLD'S FIRST!

Durometer with built-in Bluetooth

NEW GSB Series JIS/ISO compliant

The long-awaited Bluetooth-Durometer (Rubber hardness tester) is now available from Teclock, the No.1 manufacturer of Durometers.

Via Bluetooth the data can be sent with one push

Connect directly to a PC, smartphone, or tablet via Bluetooth, send data with one push.

Multifunctionality realized through integration with free app


As combined with SmartMeasure™ Lite , it is possible to monitor peak hardness values and changes over time.

Compliant with JIS K 6253, ISO 48, and ASTM D 2240

Type A and Type D are now available. More products will be added in the future.

Specification

	TypeA	TypeD
Minimum Indication unit	Hardness0.1	
Tolerance	Hardness±0.5	
Conform Standards	JIS K 6253/ ISO 48/ASTM D 2240	
Body Color	Champangne Gold / Champangne Blue	
Spring Load value	550-8050mN(56.1-821.1gf)	0-44450mN(0-4533gf)
Pressurized Face	Square BaseW39xD16 / Round Base:Φ18	
Indenter height	2.50mm	
Bluetooth Transmission	Built-in (standard)	
Weight	Approx. 320g	

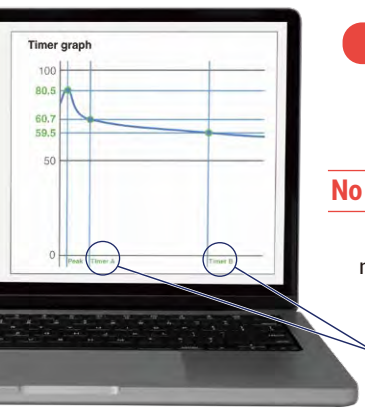

Free of charge App provided by Teclock

SmartMeasure™ Lite
for Durometer

No need to count seconds using a stopwatch!

Supports peak values and elapsed time measurements, which are important for rubber hardness measurement.

Timer A and B seconds can be set as desired!

i.g., Timer A 3seconds, Timer B 15seconds

Selectable Pressurized Face and Body Color



Square Base | Round Base





Lineup

Champangne Gold

＊Image is TypeD, Round Base

TypeA

Square Base	GSB-719N-CG
Round Base	GSB-719R-CG

Suggested Price TBA

TypeD

Square Base	GSB-720N-CG
Round Base	GSB-720R-CG

Suggested Price TBA

Champangne Blue

＊Image is TypeA, Square Base

TypeA

Square Base	GSB-719N-CB
Round Base	GSB-719R-CB

Suggested Price TBA

TypeD

Square Base	GSB-720N-CB
Round Base	GSB-720R-CB

Suggested Price TBA

The contents are subject to change without notice.

SmartTester™

For questions or inquiries, please contact us here.

TECLOCK Corporation ✉ teclock@teclock.co.jp

HEAD OFFICE 2-10-3 Naruta-cho, Okaya-shi, Nagano, 394-0042
PHONE: +81-266-22-5920 FAX: +81-266-22-4914

https://teclock.co.jp/en/
TECLOCK Website teclock english