


6

Caliper

All-in-one caliper with built-in Bluetooth for measuring inside diameter, outside diameter and depth.

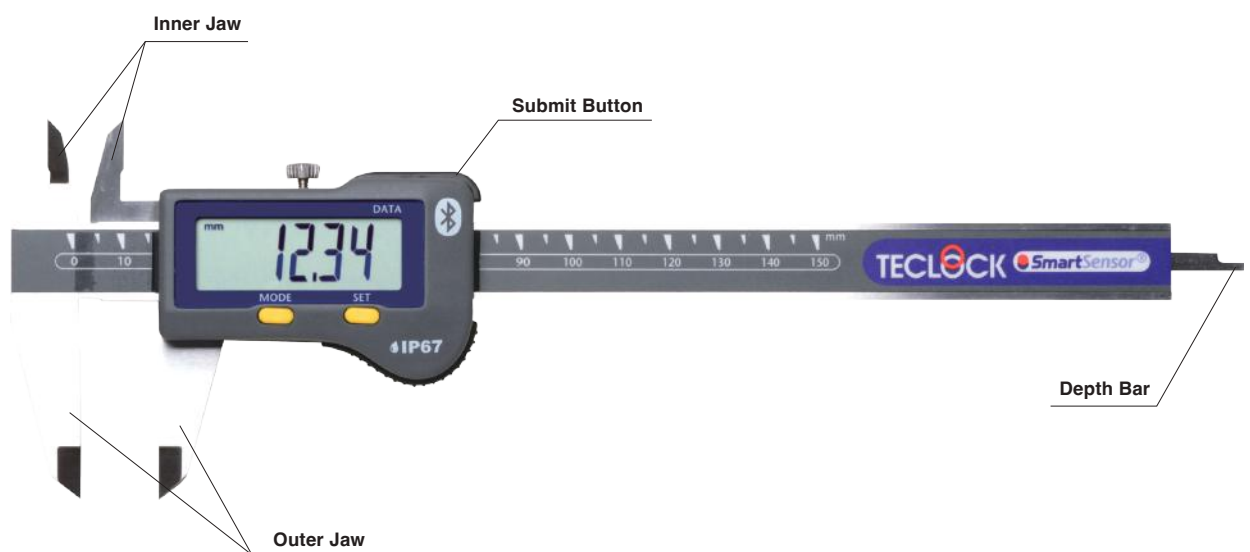

Three types of calipers with measuring ranges of 150 mm, 200 mm, and 300 mm are available. By built-in Bluetooth, no adapters and cables for interface and One-touch data sending to PC or smartphone.

Bluetooth Digital Caliper	96
Bluetooth Digital Pitch Caliper	97

Bluetooth Digital Caliper

NEW

Standard Series


- Lineups for three sizes.
- IP67.
- One-touch data sending to PC or smartphone by built-in Bluetooth.
- Data management by SmartMeasure®Lite (free).


SSC-650


·Measuring Range 0-150mm


SSC-750

·Measuring Range 0-200mm

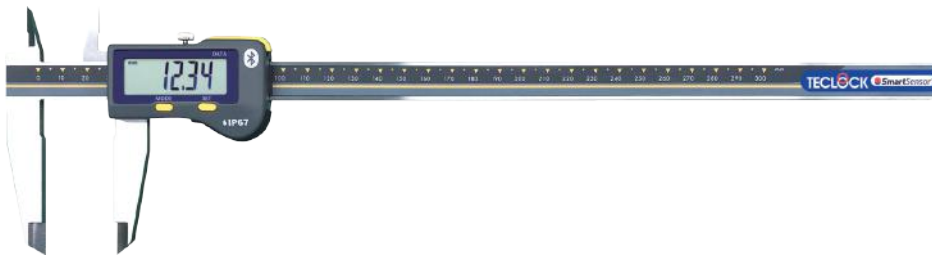
SSC-850

·Measuring Range 0-300mm

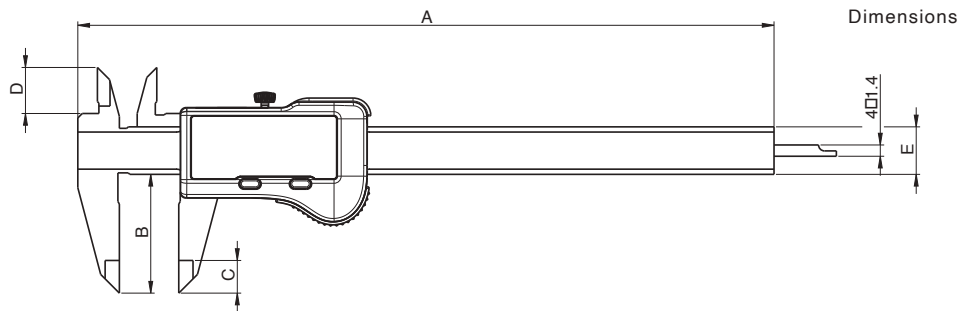

Dimensions

	A	B	C	D	E	Depth rod
SSC-650	234.5	40	11	16	16□3.5	4□1.4
SSC-750	290.5	50	14	19	16□3.5	4□1.4
SSC-850	388.0	64	14	19	16□4.0	—

unit : mm

Specifications

Model	Resolution (mm)	Measuring Range (mm)	Indication Error (mm)	IP Rating	Battery	Weight (g)	Suggested List Price
SSC-650	0.01	0-150	±0.02(0-100mm) ±0.03(100-150mm)	IP67	CR2032	175	48,600 JPY
SSC-750	0.01	0-200	±0.02(0-100mm) ±0.03(100-200mm)	IP67	CR2032	205	78,600 JPY
SSC-850	0.01	0-300	±0.02(0-100mm) ±0.03(100-300mm)	IP67	CR2032	275	94,800 JPY



Bluetooth Digital Pitch Caliper

NEW




SSC-650P

- Measuring pitch from hole to hole and from end face to hole

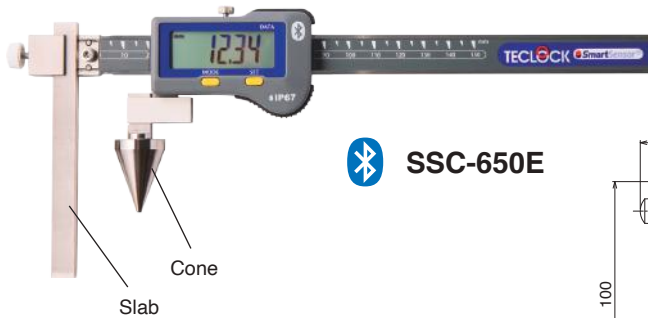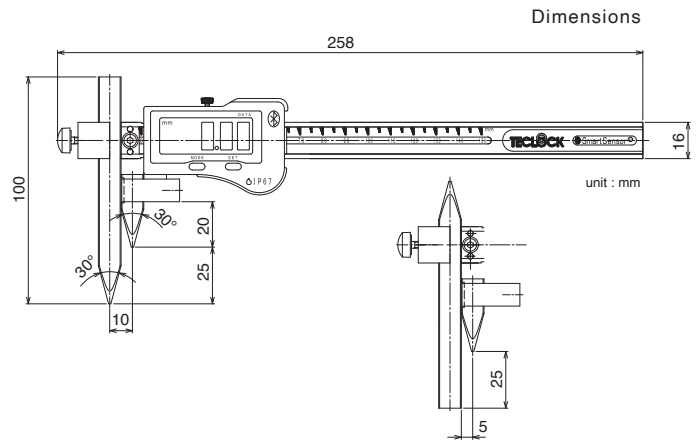


SSC-650E

- Measuring pitch from end-face to hole

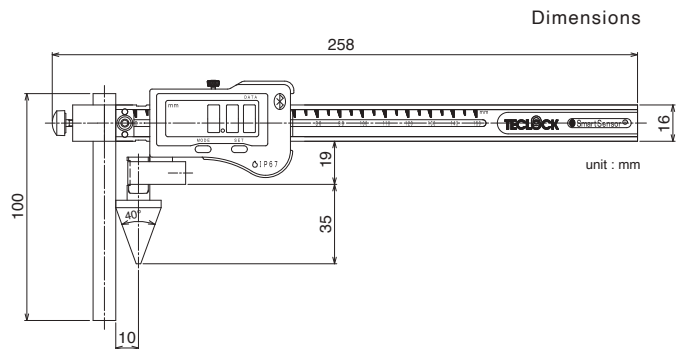

SSC-650C

- Measuring pitch from hole to hole

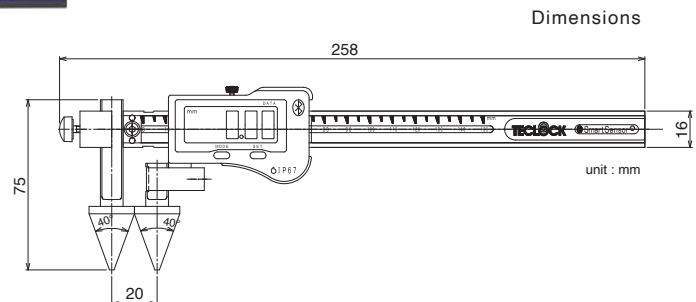

Specifications

Model	Measuring Range(mm)	Resolution (mm)	Indication Error(mm)	Full length (mm)	Fixed Jaw	Slider Jaw	Battery	Weight (g)	Suggested List Price
SSC-650P	5-150/10-150	0.01	±0.03	258	Planar Cone	Planar Cone	CR2032	235	139,500 JPY
SSC-650E	10-150	0.01	±0.03	258	Slab	Cone	CR2032	265	159,300 JPY
SSC-650C	20-150	0.01	±0.03	258	Cone	Cone	CR2032	300	191,200 JPY

